


AKH-0.66/K split current transformer


Product feature

AKH-0.66/K series split current transformers are mainly used in reconstructing projects of urban and rural power grids. They can be mounted easily without removal of primary bus. They also can be operated with electricity, which prevents the normal utilization of electricity. Thus, they save the manpower, material resources and financial resources and improve the efficiency of users. < This series match with relay protection, measuring and metering equipment.

Explanation for type

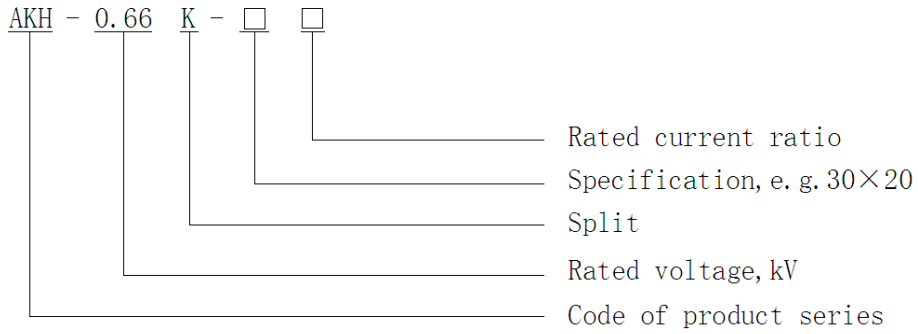

Spec. and size

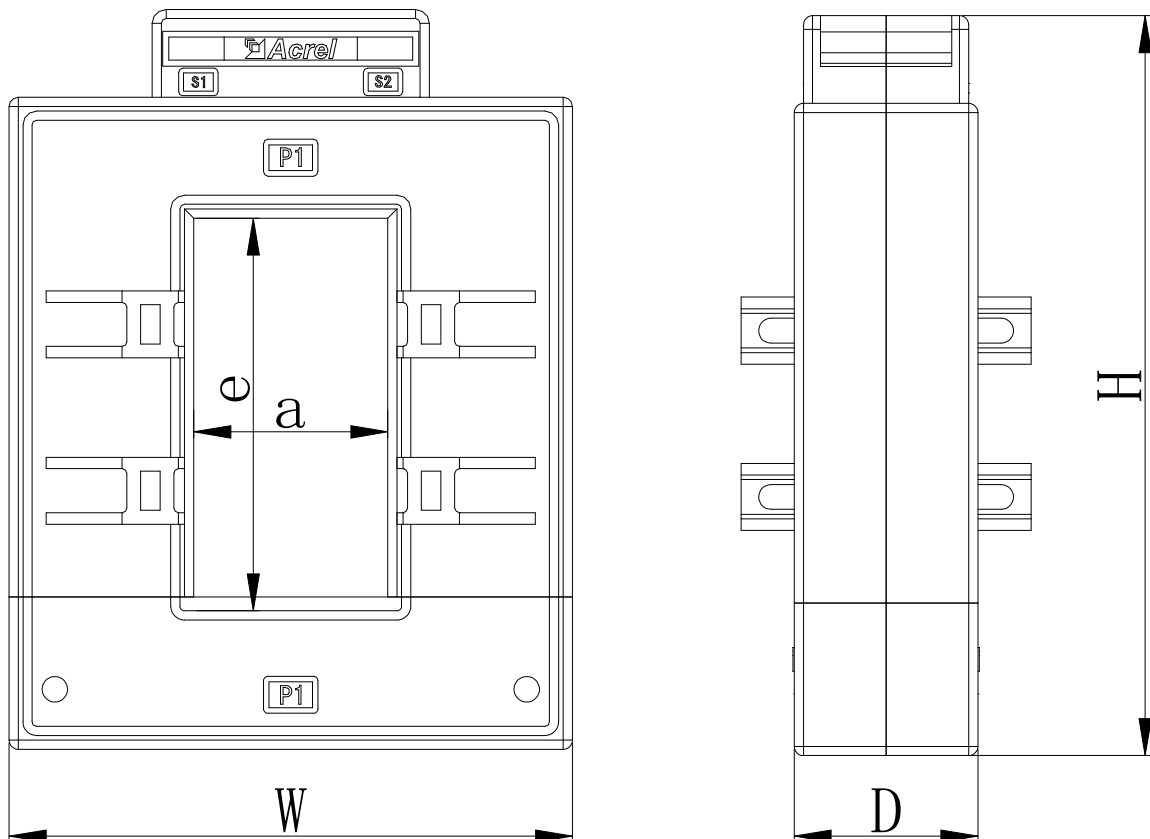

Cross-reference tables of spec. -parameter

Size Specification	Outline size			Through size		Note	
	W	H	D	a	e	Specification(A)	Quality (kg)
K-30×20	90	114	40	22	32	20-400	0.8-0.9
K-60×40	114	140	36	42	62	250-2000	1.0-2.0
K-80×40	122	162	40	42	82	300-3000	1.2-2.4
K-80×50	114	159	36	52	82	250-1000	1.1-1.4
K-80×80	144	159	36	82	82	250-1000	1.3-1.5
K-120×80	144	199	36	82	122	500-1500	1.5-2.3
K-120×60	164	214	52	62	122	400-5000	1.6-3.0
K-100×40	144	194	52	42	102	1000-5000	1.6-3.2
K-130×40	144	224	52	42	132	1000-5000	1.6-3.6
K-140×60	164	234	52	62	142	1000-5000	1.7-3.7
K-160×80	184	254	52	82	162	1000-5000	2.8-3.7
K-200×80	184	294	52	82	202	1000-5000	3.5-4.5

Cross-reference tables of spec. -parameter



Type	Rated current ratio(A)	Precision degree	Rated load,VA
K-30×20	20-75/1A	1.0	0.2
	100-150/5 (1) A		1.0
	200/5 (1) A		1.5
	250-300/5 (1) A	0.5	1.5
	350-400/5 (1) A		2.5
K-60×40	250-300/5 (1) A	1	1.5
	350-450/5 (1) A	0.5	1.5
	500-800/5 (1) A		2.5
	1000-1250/5 (1) A		5
	1500-2000/5 (1) A		10
K-80×40	300-450/5 (1) A	0.5	2.5
	500-800/5 (1) A		5.0
	1000-2000/5 (1) A		10



	2500-3000/5 (1) A	0.2	10
K-80×50	250-300/5 (1) A	1	1.5
	400-450/5 (1) A	0.5	1.5
	500-800/5 (1) A		2.5
	1000/5 (1) A		5
K-80×80	250-300/5 (1) A	1	1.5
	400-450/5 (1) A	0.5	1.5
	500-800/5 (1) A		2.5
	1000/5 (1) A		5
K-100×40	1000-2000/5 (1) A	0.5	10
	2500-3000/5 (1) A	0.2	10
	4000-5000A/5 (1) A		15
K-120×60	400-450/5 (1) A	0.5	2.5
	500-800/5 (1) A		5.0
	1000-2000/5 (1) A		10
	2500-5000/5 (1) A	0.2	10
K-120×80	500-800/5 (1) A	0.5	2.5
	1000-1200/5 (1) A		5
	1250-1500/5 (1) A		7.5
K-130×40	1000-2000/5 (1) A	0.5	10
	2500-5000/5 (1) A	0.2	10
	5000/5 (1) A	0.2	15
K-140×60	1000-2000/5 (1) A	0.5	10
	2500-3000/5 (1) A	0.2	10
	4000-5000/5 (1) A		15
K-160×80	1000-2000/5 (1) A	0.5	10
	2500-3000/5 (1) A	0.2	10
	4000-5000/5 (1) A		15
K-200×80	1000-2000/5 (1) A	0.5	10
	2500-3000/5 (1) A	0.2	10
	4000-5000/5 (1) A		15